

BOS-G



◆ Convenient

Quick installation standard of 19-inch embedded designed module is comfortable for installation and maintenance.

◆ Safe and reliable

Cathode material is made from LiFePO₄ with safety performance and long cycle life, The module has less self-discharge, up to 6 months without charging it on shelf, no memory effect, excellent performance of shallow charge and discharge.

◆ Intelligent BMS

It has protection functions including over-discharge, over-charge, over-current and over-high or low temperature. The system can automatically manage charge and discharge state and balance current and voltage of each cell.

◆ Eco-friendly

The whole module is non-toxic, non-polluting and environmentally friendly.

◆ Flexible configuration

Multiple battery modules can be in parallel for expanding capacity and power. Support USB upgrade, wifi upgrade(optional), remote up grade(Compatible with Deye inverter).

◆ Wide temperature

Working temperature range is from -20°C to 55°C, with excellent discharge performance and cycle life.

Model	BOS-GX(X=3,4,5,6,7,8,9,10,11,12)									
-------	----------------------------------	--	--	--	--	--	--	--	--	--

Main Parameter


Cell Chemistry	LiFePO4									
Module Energy (kWh)	5.12									
Module Nominal Voltage (V)	51.2									
Module Capacity (Ah)	100									
Battery Module Number	BOS-G15	BOS-G20	BOS-G25	BOS-G30	BOS-G35	BOS-G40	BOS-G45	BOS-G50	BOS-G55	BOS-G60
Battery Module Qty In Series (Optional)	3	4	5	6	7	8	9	10	11	12
System Nominal Voltage (V)	153.6	204.8	256	307.2	358.4	409.6	460.8	512	563.2	614.4
System Operating Voltage (V)	124.8~175.2	166.4~233.6	208~292	249.6~350.4	291.2~408.8	332.8~467.2	374.4~525.6	416~584	457.6~642.4	499.2~700
System Energy (kWh)	15.36	20.48	25.6	30.72	35.84	40.96	46.08	51.2	56.32	61.44
System Usable Energy (kWh) ¹	13.82	18.43	23.04	27.64	32.25	36.86	41.47	46.08	50.68	55.29
Rated DC Power	15.36	20.48	25.6	30.72	35.84	40.96	46.08	51.2	56.32	61.44
Charge/Discharge ² Current (A)	Recommend									
	50									
	Nominal									
100										
Peak Discharge (2 mins, 25°C)										
125										
Working Temperature (°C)	Charge: 0~55/Discharge: -20~55									
Status Indicator	Yellow: Battery High Voltage Power On Red: Battery System Alarm									
Communication Port	CAN2.0/ RS485									
Humidity	5%~85%RH									
Altitude	≤2000m									
IP Rating of Enclosure	IP20									
Dimension (W/D/H,mm)	530*602*1599					530*602*2187				
Weight Approximate (kg)	408					594				
Installation Location	Rack Mounting									
Storage Temperature (°C)	0~35									
Recommend Depth of Discharge	90%									
Cycle Life	25±2°C,0.5C/0.5C, EOL70%≥6000									
Warranty ³	10 years									
Certification	CE/IEC62619 /VDE2510-50/ UL1973 /UL9540A/UN38.3									

1. DC Usable Energy, test conditions: 90% DOD, 0.2C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.
2. The current is affected by temperature and SOC.
3. The warranty is due whichever reached first of warranty period or life cycle power.
4. Made in China.

Model	Description
-------	-------------


HVB750V/100A-EU High Voltage Battery cluster control box conforming to European or British Standards

Operating Voltage 120~750Vdc
 Nominal Charge/Discharge Current 100A
 Max.Charge/Discharge Current 125A
 DC Input Rating 12±2%/4.15A
 Operating Temperature Range -20~65°C
 Ingress Protection IP20
 Dimension (W/D/H) 440*570*150mm
 Weight Approximate 15.5kg

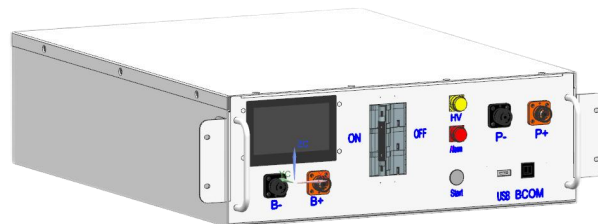


HVB750V/100A-US High Voltage Battery cluster control box conforming to North American Standard

Operating Voltage 120~750Vdc
 Nominal Charge/Discharge Current 100A
 Max.Charge/Discharge Current 125A
 DC Input Rating 12±2%/4.15A
 Operating Temperature Range -20~65°C
 Ingress Protection IP20
 Dimension (W/D/H) 440*570*150mm
 Weight Approximate 17kg

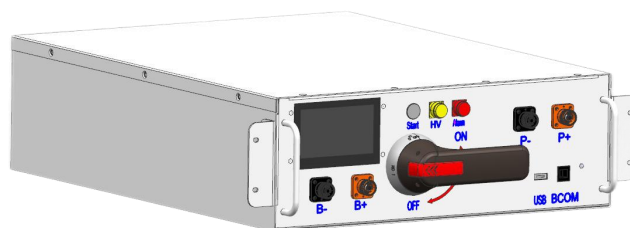

High voltage box Standard configuration:


- ① 120 ohm terminal resistance
- ② 140mm communication cable
- ③ 220mm power cable
- ④ 1.5m power cable (US Version)
2.1m power cable (EU Version)
- ⑤ Power plug

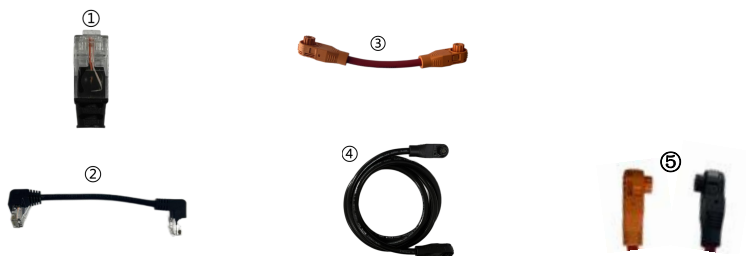

BOS-GM5.1

5.12 kwh battery module

Battery Type LiFePO4(LFP)
 Nominal Voltage 51.2Vdc
 Rated Capacity 100Ah
 Rated Energy 5.12kWh
 Nominal Charge/Discharge Current 100A
 Peak.Discharge Current 125A
 Charge Temperature 0~55°C
 Discharge Temperature -20°C~55°C
 Storage Temperature 0°C~35°C
 Ingress Protection IP20
 Dimension (W/D/H) 440*570*133mm
 Weight Approximate 44kg

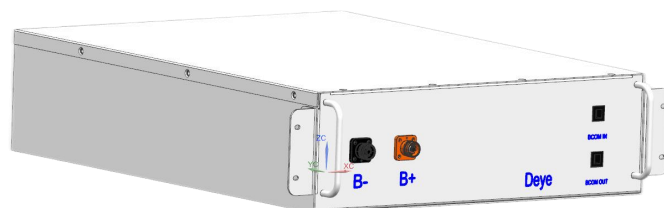

Battery module Standard configuration:

- ① 110mm communication cable
- ② 200mm power cable



EPCable5.0(Optional)

Standard 5-meter power cable connected to the positive pole of the external PCS

1000V/4AWG cable



ENCable5.0(Optional)

Standard 5-meter power cable connected to the negative pole of the external PCS

1000V/4AWG cable



Model	Description
-------	-------------

EPWR Cable5.0(Optional)

Standard 5-meter cable connected to external 12VDC power supply



ECOM Cable5.0(Optional)

Standard 5-meter communication cable connected to the external device




3U-HRACK(Optional)

Standard 19inch rack, caninstall 12 pcs batteries and 1 pcs High Voltage Battery cluster control box

Dimension (W/D/H)
Weight Approximate

589*590*2240mm
85kg

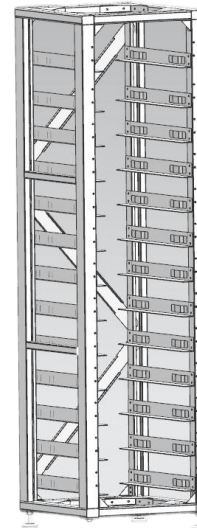

3U-LRACK(Optional)

Standard 19inch rack, caninstall 8 pcs batteries and 1 pcs High Voltage Battery cluster control box

Dimension (W/D/H)
Weight Approximate

589*590*1640mm
65kg

